

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number  
**WO 2005/084185 A2**

(51) International Patent Classification: **Not classified**

(21) International Application Number:  
PCT/US2004/005145

(22) International Filing Date: 20 February 2004 (20.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **OTIS ELEVATOR COMPANY** [US/US]; Ten Farm Springs Road, Farmington, CT 06032 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WORONOFF, Kenneth, John** [US/US]; 485 Main Street, Portland, CT 06480 (US).


(74) Agent: **GASKEY, David, J.; CARLSON, GASKEY & OLDS**, 400 W. Maple Rd., Suite 350, Birmingham, MI 48009 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A DEVICE FOR MOVING A PLATFORM ALONG ELEVATOR GUIDE RAILS

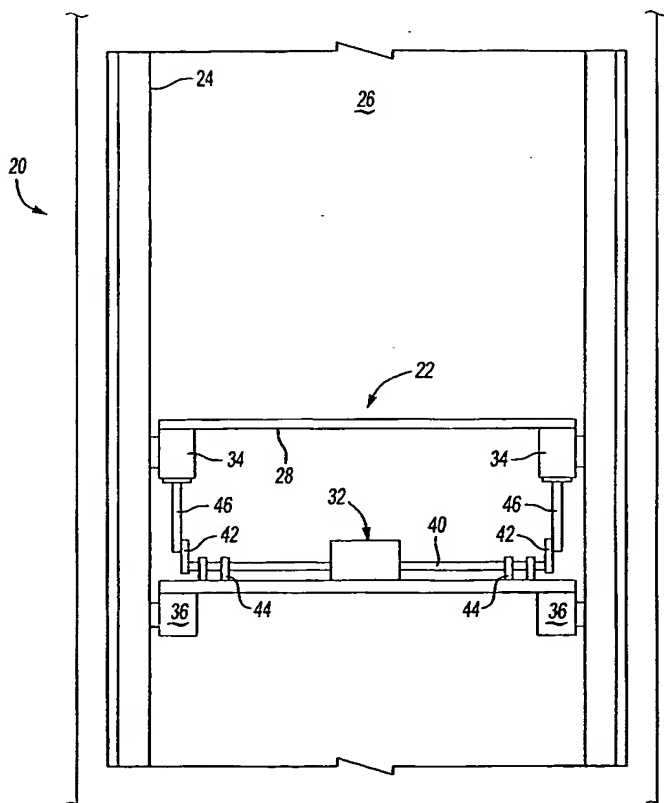

(57) Abstract: This invention generally relates to an assembly (22) for moving a platform (28) along guide rails (24) within an elevator shaft during installation of an elevator system. The assembly includes a first platform (28), a first holding device (34), a second platform (30) and a second holding device (36). The holding devices operate to allow movement in one direction and restrict movement in an opposite direction. A moving mechanism (32) cyclically urges the first and second platforms toward and away from each other. The holding devices allow only one of the platforms to move at a time responsive to the cyclical urging of the moving mechanism. This is sequentially repeated until the first platform is in a desired position.



**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*